



### FEATURES

- Operation Voltage up to 15V.
- Simple Voltage-Mode PWM Control.
- Fast Transient Response.
- 2V and 1.3V  $\pm$  2% Feedback Voltage Reference Option.
- Adjustable Current Limit without External Sense Resistors.
- 200KHz Free-Running Oscillator.
- Short-Circuit Protection with Low Short Circuit Output Current.

### APPLICATIONS

- Power Supply for Motherboard  $V_{GTL}$  (1.5V Output)
- Power Supply for Motherboard  $V_{IO}$ .
- High-Power 5V to 3.xV DC/DC Regulators.
- Low-Voltage Distributed Power Supplies.

### DESCRIPTION

The AIC1579 is a high-power, high-efficiency voltage-mode switching regulator controller for motherboard  $V_{IO}$  power supply applications. Designed to drive an N-channel MOSFET in a standard buck topology, the AIC1579 features a high voltage CMOS output driver, short-circuit protection, and 8-pin package.


An external 4-bit Digital-to-Analog Converter (DAC) can be used along with the AIC1579 to adjust the output voltage from 2.0V to 3.5V in 0.1V increments. Table 1 on the following page specifies the corresponding output voltage for 16 combinations of DAC inputs as in the typical application circuit.

The 200KHz switching frequency allows for using small external components while maintaining high conversion efficiency. The 11MHz bandwidth and 6V/ $\mu$ S slew rate of the error amplifier ensures high converter bandwidth and fast transient response.

The AIC1579 provides adjustable overcurrent and short-circuit protections by sensing the output current across the on resistance of the external N-channel MOSFET rather than an external low value sense resistor.

The AIC1579L provides lower reference voltage (1.30V) than the default (2.00V, AIC1579) for lower  $V_{OUT}$  requirement.

### ORDERING INFORMATION

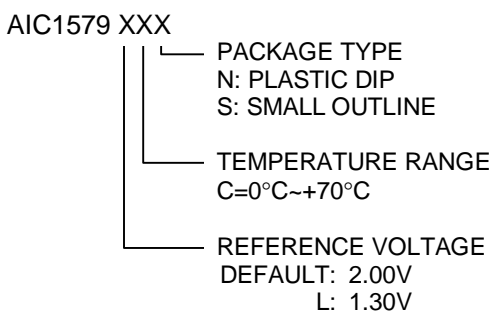


| ORDER NUMBER                             | PIN CONFIGURATION |
|--|-------------------|
| AIC1579CN<br>AIC1579LCN<br>(PLASTIC DIP) | TOP VIEW<br>      |
| AIC1579CS<br>AIC1579LCS<br>(PLASTIC SO)  |                   |

\*AIC1579: 2.00V  
AIC1579L: 1.30V



**TYPICAL APPLICATION CIRCUIT**

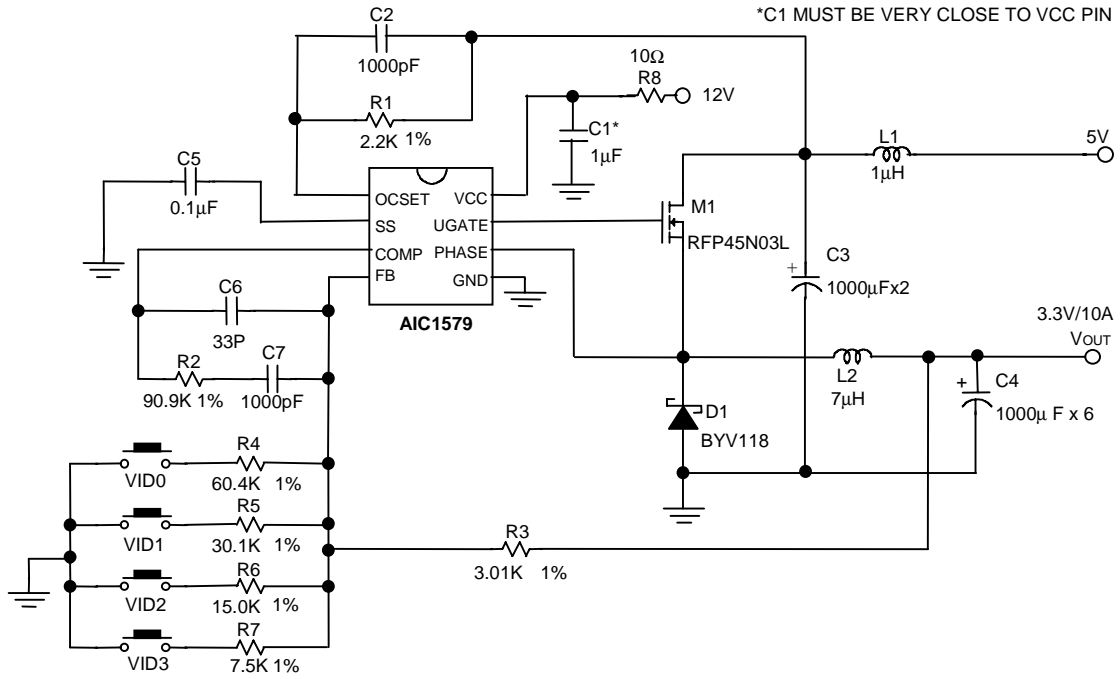

**Switching Regulator for Pentium® V<sub>CORE</sub> Supply**

**Table 1. Output Voltage Program**

| VID3 | VID2 | VID1 | VID0 | VOUT  |
|------|------|------|------|-------|
| 1    | 1    | 1    | 1    | 2.00V |
| 1    | 1    | 1    | 0    | 2.10V |
| 1    | 1    | 0    | 1    | 2.20V |
| 1    | 1    | 0    | 0    | 2.30V |
| 1    | 0    | 1    | 1    | 2.40V |
| 1    | 0    | 1    | 0    | 2.50V |
| 1    | 0    | 0    | 1    | 2.60V |
| 1    | 0    | 0    | 0    | 2.70V |
| 0    | 1    | 1    | 1    | 2.80V |
| 0    | 1    | 1    | 0    | 2.90V |
| 0    | 1    | 0    | 1    | 3.00V |
| 0    | 1    | 0    | 0    | 3.10V |
| 0    | 0    | 1    | 1    | 3.20V |
| 0    | 0    | 1    | 0    | 3.30V |
| 0    | 0    | 0    | 1    | 3.40V |
| 0    | 0    | 0    | 0    | 3.50V |

**ABSOLUTE MAXIMUM RATINGS**

Supply Voltage,  $V_{CC}$  ..... 15V  
 Input, Output, or I/O Voltage ..... GND-0.3V to  $V_{CC}+0.3V$   
 ESD Classification ..... Class 2

**Recommended Operating Conditions**

Supply Voltage,  $V_{CC}$ ..... 12V  $\pm$ 10%  
 Ambient Temperature Range ..... 0°C~70°C  
 Junction Temperature Range ..... 0°C~ 100°C

**Thermal Information**

Thermal Resistance,  $\theta_{JA}$  (Typical, Note 1)

SOIC Package ..... 100°C/W

SOIC Package (with 3 in<sup>2</sup> of Copper) ..... 90°C/W

Maximum Junction Temperature (Plastic Package) ..... 150°C

Maximum Storage Temperature Range ..... -65°C~150°C

Maximum Lead Temperature (Soldering 10 Sec) ..... 300°C

Note 1:  $\theta_{JA}$  is measured with the component mounted on an evaluation PC board in free air.

**TEST CIRCUIT**

Refer to TYPICAL APPLICATION CIRCUIT.

**ELECTRICAL CHARACTERISTICS (VCC= 12V, Ta=25°C, unless otherwise specified.)**

| PARAMETER                         | TEST CONDITIONS     | SYMBOL    | MIN.         | TYP.         | MAX.         | UNIT       |
|-----------------------------------|---------------------|-----------|--------------|--------------|--------------|------------|
| <b>VCC Supply Current</b>         |                     |           |              |              |              |            |
| Nominal Supply                    | UGATE Open          | $I_{VCC}$ |              | 2            |              | mA         |
| <b>Power-On Reset</b>             |                     |           |              |              |              |            |
| $V_{CC}$ Threshold                | $V_{OCSET}=4.5V$    |           |              | 9.5          |              | V          |
| <b>Oscillator</b>                 |                     |           |              |              |              |            |
| Frequency                         |                     |           | 160          | 200          | 240          | KHz        |
| Duty Cycle                        |                     |           |              | 84           |              | %          |
| <b>Internal Reference Voltage</b> |                     |           |              |              |              |            |
| Reference Voltage                 | AIC1579<br>AIC1579L |           | 1.96<br>1.27 | 2.00<br>1.30 | 2.04<br>1.33 | V          |
| <b>Error Amplifier</b>            |                     |           |              |              |              |            |
| DC Gain                           |                     |           |              | 76           |              | dB         |
| Gain-Bandwidth Product            |                     | GBW       |              | 11           |              | MHz        |
| Slew Rate                         |                     | SR        |              | 6            |              | V/ $\mu$ S |

**ELECTRICAL CHARACTERISTICS (Continued)**

| PARAMETER            | TEST CONDITIONS      | SYMBOL      | MIN. | TYP. | MAX. | UNIT     |
|----------------------|----------------------|-------------|------|------|------|----------|
| <b>Gate Driver</b>   |                      |             |      |      |      |          |
| Upper Gate Source    |                      | $R_{UGATE}$ |      | 8    | 12   | $\Omega$ |
| Upper Gate Sink      |                      | $R_{UGATE}$ |      | 5.5  | 10   | $\Omega$ |
| <b>Protection</b>    |                      |             |      |      |      |          |
| OCSET Current Source | $V_{OCSET} = 4.5VDC$ | $I_{OCSET}$ | 170  | 200  | 230  | $\mu A$  |
| SS Current           |                      | $I_{SS}$    |      | 10   |      | $\mu A$  |

**PIN DESCRIPTIONS**

**PIN 1: OCSET**- Current limit sense pin. Connect a resistor  $R_{OCSET}$  from this pin to the drain of the external MOSFET.  $R_{OCSET}$ , an internal  $200\mu A$  current source ( $I_{OCSET}$ ), and the external MOSFET on-resistance ( $R_{DS(ON)}$ ) jointly set the overcurrent trip point according to the following equation:

$$I_{PEAK} = \frac{I_{OCSET} \times R_{OCSET}}{R_{DS(ON)}}$$

If FB pin voltage is sensed to be below 50% of the internal voltage reference VDAC, the overcurrent comparator cycles the soft-start function.

**PIN 2: SS** - Soft start pin. Connect a capacitor from this pin to ground. An internal  $10\mu A$  current source provides soft start function for the converter.

**PIN 3: COMP** - External compensation pin. This pin is connected to error amplifier output and PWM comparator. A RC network is connected to FB pin to compensate the voltage-control feedback loop of the converter.

**PIN 4: FB** - The error amplifier inverting input pin. The FB pin and COMP pin are used to compensate the voltage-control feedback loop.

**PIN 5: GND**- Ground pin.


**PIN 6: PHASE**- Overcurrent detection pin. Connect the PHASE pin to source of the external N-MOSFET. This pin detects the voltage drop across the MOSFET  $R_{DS(ON)}$  for overcurrent protection.

**PIN 7: UGATE**- External MOSFET gate drive pin. Connect this pin to gate of the external MOSFET.

**PIN 8: VCC** -The chip power supply pin. Recommended supply voltage is 12V.




APPLICATION CIRCUIT

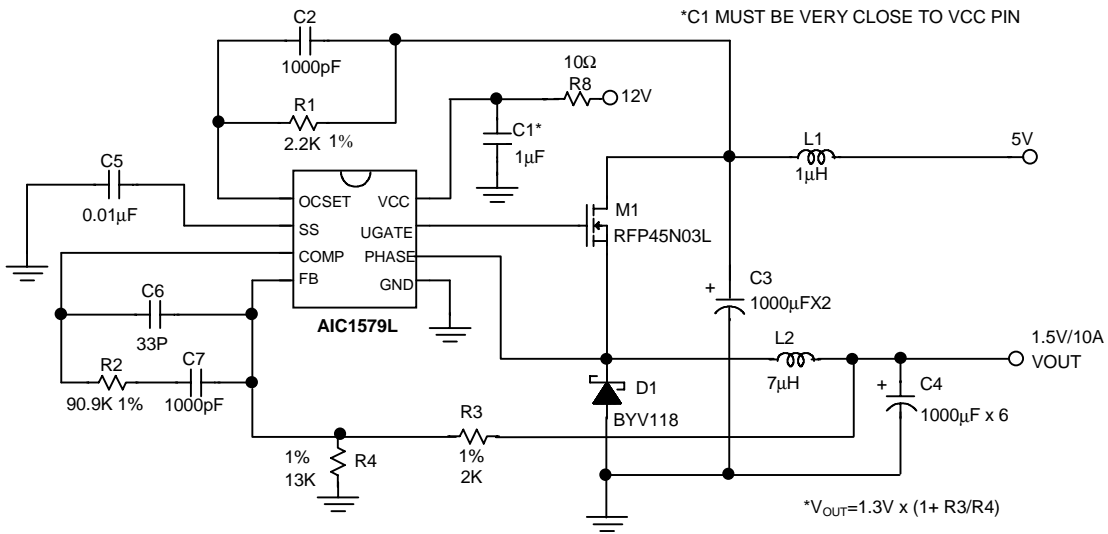

PHYSICAL DIMENSIONS


- 8 LEAD PLASTIC SO (unit: mm)

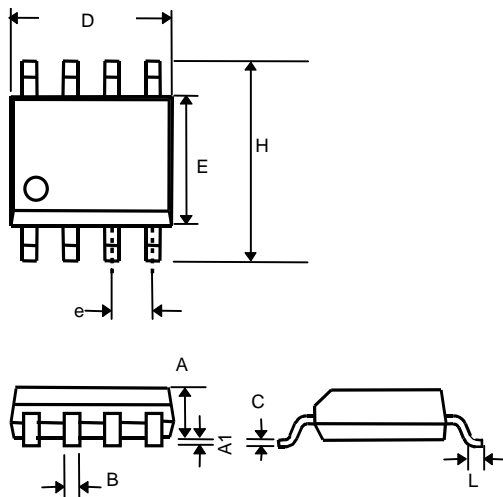

| SYMBOL | MIN       | MAX  |
|--------|-----------|------|
| A      | 1.35      | 1.75 |
| A1     | 0.10      | 0.25 |
| B      | 0.33      | 0.51 |
| C      | 0.19      | 0.25 |
| D      | 4.80      | 5.00 |
| E      | 3.80      | 4.00 |
| e      | 1.27(TYP) |      |
| H      | 5.80      | 6.20 |
| L      | 0.40      | 1.27 |



● 8 LEAD PLASTIC DIP (unit: mm)

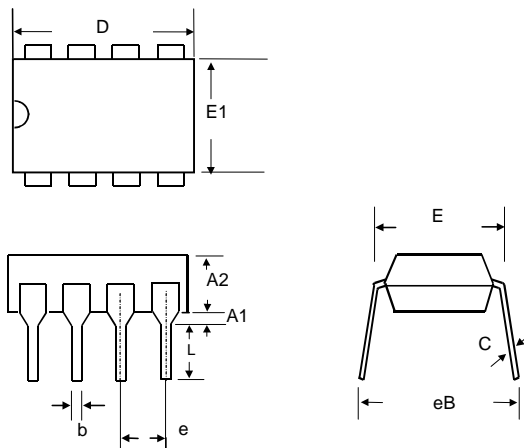

| SYMBOL | MIN        | MAX   |
|--------|------------|-------|
| A1     | 0.381      | —     |
| A2     | 2.92       | 4.96  |
| b      | 0.35       | 0.56  |
| C      | 0.20       | 0.36  |
| D      | 9.01       | 10.16 |
| E      | 7.62       | 8.26  |
| E1     | 6.09       | 7.12  |
| e      | 2.54 (TYP) |       |
| eB     | —          | 10.92 |
| L      | 2.92       | 3.81  |